

INTEGRA Version 1.5.0 Firmware Release

Ag Leader Technology is pleased to announce the release of INTEGRA 1.5.0. Features and improvements in this version are listed below. This free upgrade is available for download from <http://www.agleader.com>.

General Improvements

- **NEW:** Swath width resolution has been increased for implement and guidance widths ¹
- **NEW:** Language support for Croatian and Norwegian
- **ENHANCED:** Management selection steps have been combined in field operation wizard

Guidance


- **NEW:** SmartPath™ guidance with ability to toggle between SmartPath and AB modes
- **ENHANCED:** Engage Icon with ParaDyme to show ready to engage state

Harvest

- **NEW:** Ability to import planting variety maps for use with Variety Tracking during harvesting ²

DirectCommand (Application)

- **NEW:** Support for Ramsay bypass control valve
- **ENHANCED:** Liquid control diagnostic additions of PWM and Flow Meter frequencies
- **NEW:** Added Application Rate module support for Reco/Sulky and RDS serial controllers
- **ENHANCED:** Auxiliary Input screen adds a new graphically intuitive Switch Assignment screen and enhanced assignment review table for viewing switches and functions.

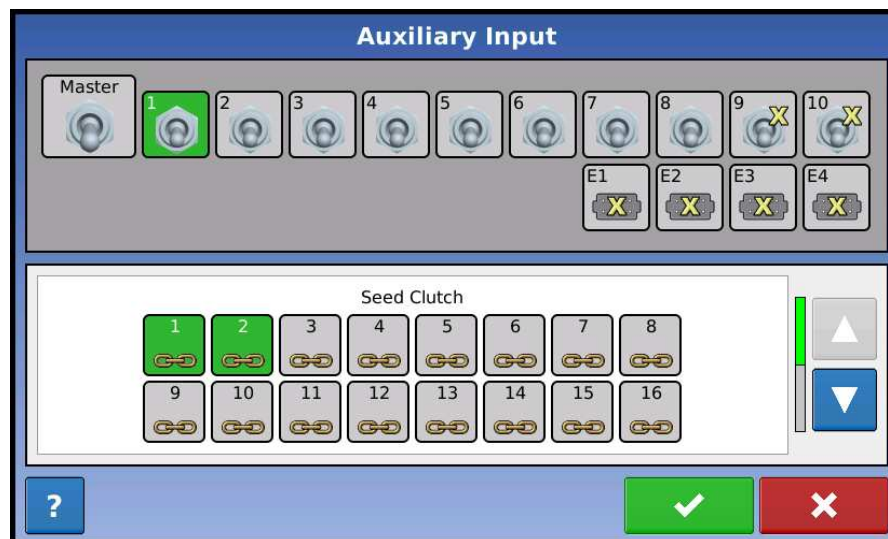

¹ An updated version of SMS desktop software will be required to read the pattern (.PAT) files that are created from this display version. The updated SMS version will be v10.01 and available in the middle of July. To check for the update, start SMS, go to Help Menu and select Check for Updates.

² Variety reference maps are created by utilizing SMS desktop software to merge and export planting maps from multiple displays into the new .REF file format. Planting maps can originate from Ag Leader InSight, EDGE, and INTEGRA displays as well as other display brands.

Instructions for updating:

1. Copy the latest upgrade file to your external USB drive. It will have a .fw2 file extension.
2. Insert the external USB drive in the display.

3. Press  then  then **Advanced tab**, and then press



4. When it asks you "Do you wish to back up all data to the external storage device?" Press **YES**.



5. When the "Backup is Complete" message appears, press




6. Then press



7. Then press



8. Then press



9. When the upgrade dialog box appears, select the .fw2 upgrade file, then press

10. A window will appear and will state that "The upgrade is ready to install". It will also warn, "Do not



disconnect power" and then press

11. The display will progress through the upgrade steps, the display will automatically power cycle during the upgrade.

12. The upgrade is now complete.